

MEP Hire's Access Towers Range

MEP Hire is an access specialist with a wide range of access towers suitable for different areas, ranging from working heights of 3.2-32.2m



MiTower Alloy Access Tower

This quick assembly alloy access tower provides a safe and convenient platform for working at heights up to 6 m. Choose from a one or two person tower, depending on your requirements.




Bridge Quick Access Tower

MEP Hire's versatile and high quality Bridge Quick mobile tower offers a safe, yet speedy build, providing an incredibly stable working platform with a generous working area.




MiStairs Alloy Access Tower

A safe, quick and easy to assemble alloy tower, providing a robust access option around staircases. Suitable for one-person operation.

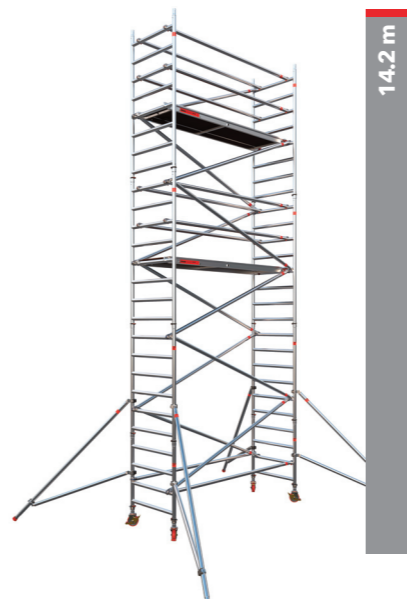

Eiger 250 Alloy Access Tower

A versatile and EN1004 compliant scaffold tower, suitable for both internal and external use by up to two people.

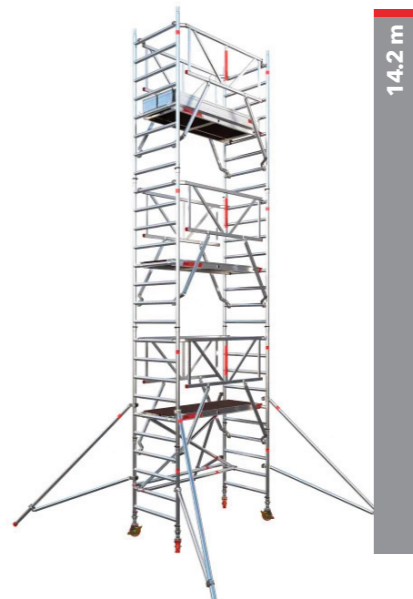

Safe Quick (AGR) Alloy Access Tower

Choose the AGR option for added safety guardrails to protect the user/s further during build and use.



MiTower LiftShaft Alloy Access Tower

Reach heights in lift spaces and confined areas safely and quickly. Easy, one person build and operation. Multiple size options available from 4.2 - 32.2 m.

Working Height Range	4 - 6 m	3.7 - 6.7 m	4.2 - 6.7 m	3.2 - 14.2 m	4.2 - 14.2 m	6.2 - 32.2 m
Platform Height Range	2 - 4 m	1.7 - 4.7 m	2.2 - 4.7 m	1.2 - 12.2 m	2.2 - 12.2 m	4.2 - 30.2 m
Platform Size	1021 x 610 mm / 1472 x 610 mm	3800 x 2500 mm	1021 x 610 mm	2500 x 1800 mm	2500 x 1800 mm	610 x 1020 mm
Working Footprint	2800 x 2400 mm / 3900 x 3100 mm	2400 x 3500 mm	1170 x 728 mm	Various	Various	780 x 1320 mm
Single/double deck	Single	Single	Single	Single / Double	Single / Double	Single
Weight	110 / 126 kg	230 - 382 kg	67 - 107 kg	71 - 406 kg	104 - 410 kg	71 - 590 kg
Maximum Load	150 / 240 kg	750 kg	200 kg	275 / 550 kg	275 / 550 kg	150 kg
Indoor/Outdoor Use	Indoor / Outdoor	Indoor / Outdoor	Indoor / Outdoor	Indoor / Outdoor	Indoor / Outdoor	Indoor
Assembly	10 mins (max two person)	20 mins (max two person)	20 mins (max two person)	20 mins (max two person)	20 mins (max two person)	10 mins (max two person)
Safety Features	EN 1004 Class 3 compliant	ISO 9001, EN 1004 Class 3 and BS 1139 compliant	BS1139 Part 6 and EN 1004 Class 3 compliant	EN 1004 Class 3 compliant	EN 1004 Class 3 compliant	EN 1004 Class 3, EN 1139 6 and ISO 9001 compliant