



JLG MICRO SCISSOR LIFT ES1530L

**Reach indoor working heights
of up to 6.57 metres safely
and efficiently...**

Lightweight. Efficient. Compact.



Versatile: suitable for indoor work on sensitive flooring, as well as for outdoor (wind rated) applications.



Easily Manoeuvrable: compact and lightweight with zero turning radius for work in tight spaces.



Increase Productivity: electric drive with reduced hydraulic fittings for increased up-time, fewer leaks and service calls.



Improve Safety: only authorised users can operate the machine. Supports safe work at inclines of up to 3%. Complies with EN 280 specifications.

CONTACT MEP HIRE

T: 0800 587 5121

E: hire@mephire.co.uk


W: www.mephire.co.uk



MEP Hire

Mechanical, Electrical & Low Level Access Specialists

SPECIFICATIONS

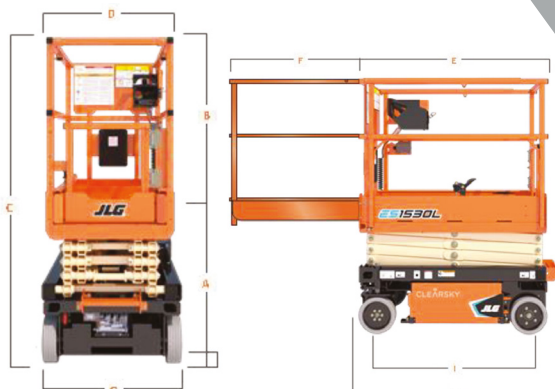

A. Platform height (lowered) 0.8m

B. Platform railing height 1.1m

C. Machine height 1.9m

D. Platform width 0.6m

E. Platform length 1.3m

F. Platform extension 55cm

G. Machine width 76cm

H. Machine length 1.4m

I. Wheelbase 1.1m

J. Ground clearance 6cm

Max indoor height	6.57m (working) - 4.57m (platform)
Max outdoor height	5m (working) - 3m (platform)
Platform capacity	227kg
Dimensions	H: 1.9m W: 76cm L: 1.4m
Number of occupants	Max 1 person (indoor and outdoor)
Lift and lower time	19 seconds (no load), 17 seconds (rated load)
Max drive height	Fully elevated
Weight	880kg
Ground bearing pressure	116psi or 8.1kg/cm ²
Gradability	25%
Drive speed	2.4mph (lowered) or 0.5mph (elevated)
Tilt rating (side-to-side)	2.5 degrees (indoor) 1.5 degrees (outdoor)
Tilt rating (fore and aft)	3 degrees (indoor and outdoor)
Turning radius	Zero (indoor) 1.4m (outdoor)
Reservoir capacity	5 litres (Hydraulic)
Power source	Batteries: 2x 12V 105 Amp-hr, Charger: 27 Amp, Drive: 24V Electric

CONTACT MEP HIRE

T: 0800 587 5121

E: hire@mephire.co.uk

W: www.mephire.co.uk



MEP Hire

Mechanical, Electrical & Low Level Access Specialists